

YSDR40 Redundancy Module 40A



Yingjiao's redundancy module YSDR40 can be suitable for redundancy operation of 12V/24V/48V systems.

With higher peak current, the entire series have built-in 2 channels DC OK signal and alarm relay contact.

It can be used with a power supply to improve overall system operation reliability.



Features



Support 1+1 and N+1 redundancy system



Suitable for redundancy operation of 12V/24V/48V systems



2 channels input and 1 output



Built-in 2 channels DC OK signal and alarm relay contact



Installation: DIN Rail TS-35/7.5 & 15



Three Years Warranty

Model Information

Yingjiao Part number	INPUT VOLTAGE	INPUT VOLTAGE RANGE	INPUT RATED CURRENT	OUTPUT RATED CURRENT
YSDR40-12	12Vdc	9~14Vdc	0~40A per input Continuous	0~40A, Continuous
YSDR40-24	24Vdc	19~29Vdc	0~40A per input Continuous	0~40A, Continuous
YSDR40-48	48Vdc	36~60Vdc	0~40A per input Continuous	0~40A, Continuous

Input

NUMBER OF INPUT	2 Channels		
VOLTAGE DROP (Vin-Vout) (max.)	0.5V		
PEAK CURRENT	0~60A per input, 5Sec.		
EFFICIENCY (Typ.)	95%		
INPUT REVERSE CURRENT (max.)	1mA		
INPUT REVERSE VOLTAGE (max.)	40Vdc	YSDR40-12	
	40Vdc	YSDR40-24	
	65Vdc	YSDR40-48	

Output

PEAK CURRENT (max.)	60A, 5Sec.
CAPACITANCE(Typ.)	320uF
STANDBY POWER LOSSES(Typ.)	1.5W

Protection

OVER LOAD	<60A,5Sec. No damage
SHORT CIRCUIT	<60A,5Sec. No damage

Function

REDUNDANCY	For 1+1 redundancy ,and support N+1 redundancy	
BOTH INPUTS VOLTAGE ALARM	<8.5V or >14.7V (± 5%)	YSDR40-12
	<18V or >31V (± 5%)	YSDR40-24
	<34.2V or >63V (± 5%)	YSDR40-48
RELAY	30Vdc/1A resistive load	
LED STATUS DISPLAY	Green LED OK	

Environment

COOLING	Free air convection	
WORKING TEMP. Note.2	-40 ~ +80 °C (Refer to "Derating Curve")	
WORKING HUMIDITY	5 ~ 95% RH non-condensing	
STORAGE TEMP.	-40 ~ +85 °C	
TEMP. COEFFICIENT	± 0.03%/ °C (0 ~ 60 °C)	
VIBRATION	Component:10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC61373	
OPERATING ALTITUDE Note.3	5000 meters/OVC II	

SAFETY & EMC (Note 4)

SAFETY STANDARDS	IEC62368-1	
WITHSTAND VOLTAGE	IP/OP - Chassis : 0.5KVac; IP/OP- Relay : 0.5KVac ; Relay - Chassis : 0.5KVac	
ISOLATION RESISTANCE	IP/OP - Chassis, IP/OP- Relay, Relay - Chassis:>100M Ohms / 500Vdc / 25 °C / 70% RH	
EMC EMISSION	BS EN/EN55032 ClassB	
EMC IMMUNITY	EN61000-4, 2, 3, 4, 5, 6, 8	


Dimensions & Weight

Length:	55mm / 2.17in
Width:	101mm / 3.98in
Height:	125mm / 4.92in
Weight:	0.5kg

Packing


Carton Size:	39.5 x 32.5 x 27.5 CM 15.55 x 12.8 x 10.83 in
Master Carton Quantities:	20pcs / Carton

Mechanical Specification

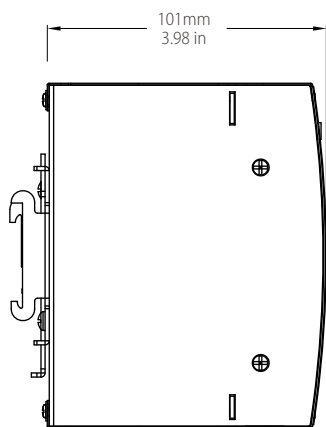

Input


No.	Description
1	DC input +Vin2
2	DC input -Vin2
3	DC input +Vin1
4	DC input -Vin1

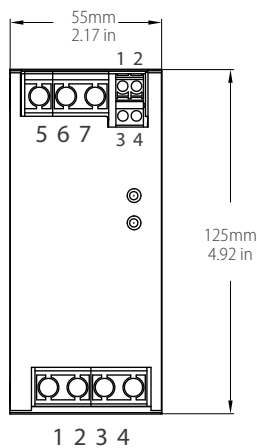

Output

No.	Description
1,2	Alarm1 DC OK
3,4	Alarm2 DC OK
5	FG
6	DC output +Vout
7	DC output -Vout

Block Diagram

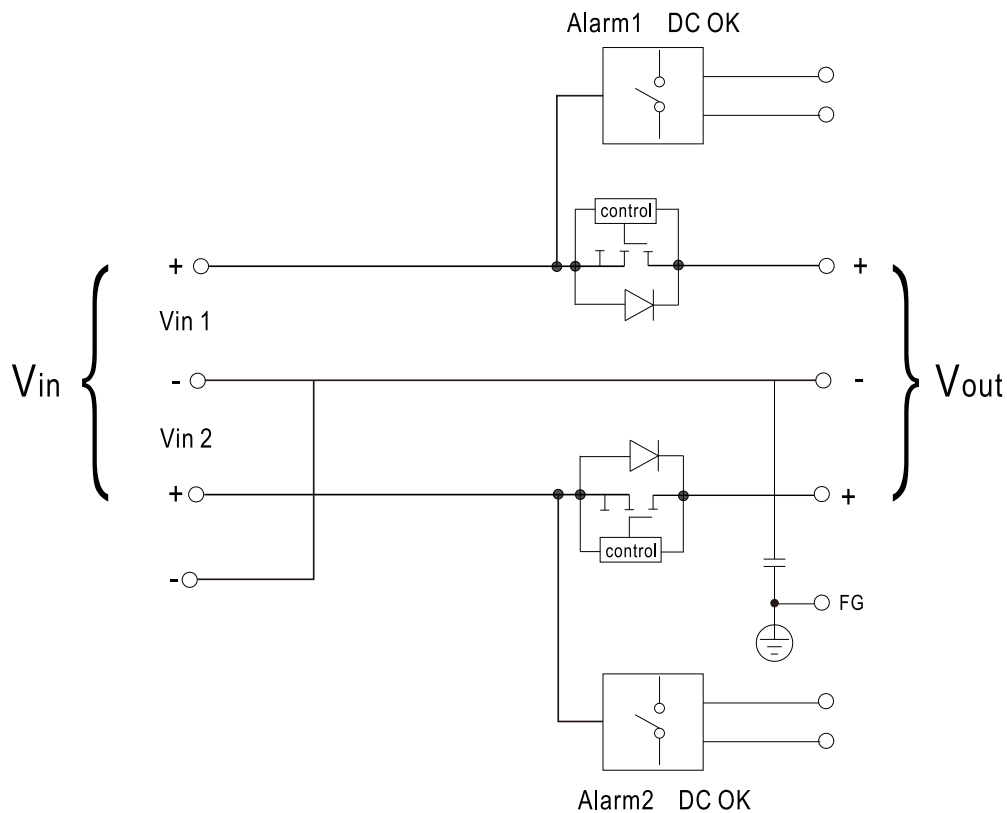


DC OK Relay contact

Contact Ratings (max.)	30V/1A resistive load
Contact Close(DC OK)	PSU turns on
Contact Open(DC Fail)	PSU turns off / over or under input voltage

Typical Application Notes


1. 1+1 Redundancy:

Using 1 or more AC-DC power supply as the redundant unit.

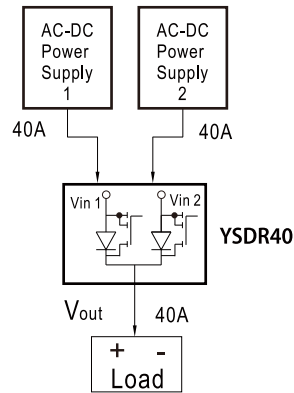


3. Single Use:

Only one AC-DC power supply is connected to ONE YSDR40 to reduce stress on the MOSFET in order to improve system reliability

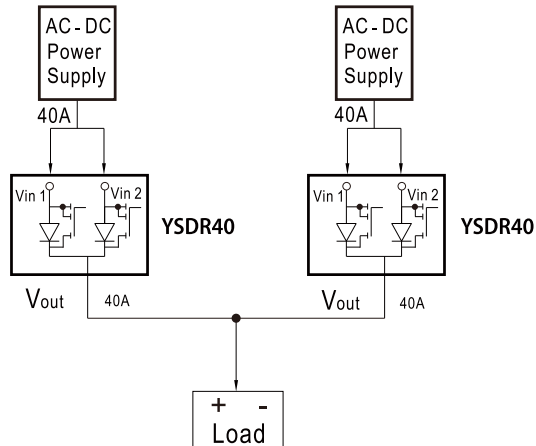


2. 1+N Redundancy:

The more AC-DC power supplies are used as redundancy to improve system reliability

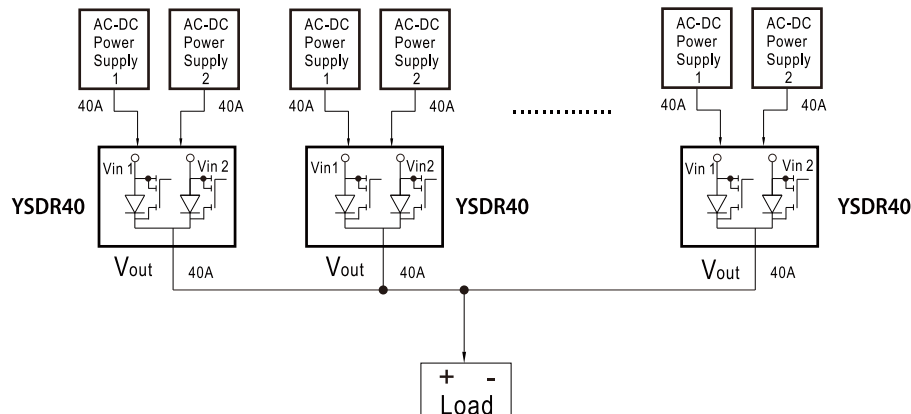

Deduction Curve And Temperature

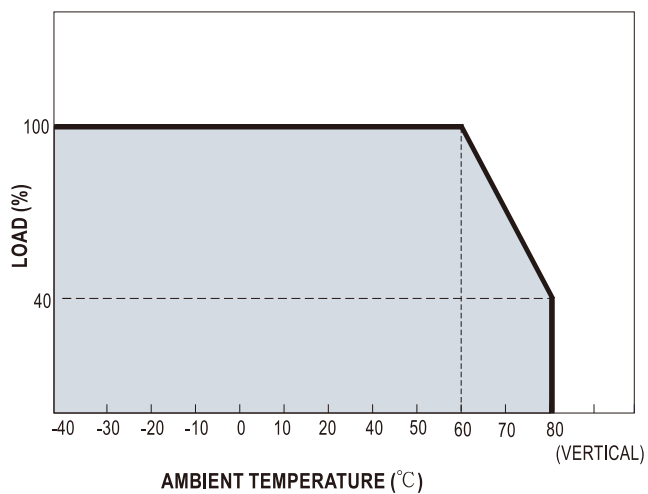

Minus Output And Input Voltage Curves

