

YS100 SERIES



Input: 85-265VAC 50/60Hz
Output Voltage: 5V-36V DC
Rated Power: 100W max

Features

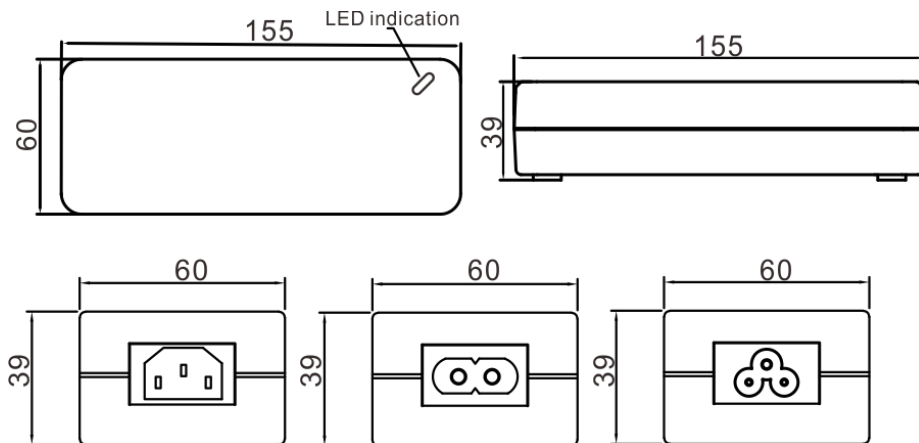
Univeral AC input/ Full range
Energy efficiency level VI
Leakage Current: < 0.25mA
Extremely low leakage current
Protection: Over load/Over voltage/Short circuit
Withstand voltage : 3KV
Life Warranty: 3 years

Application


Digital equipment
Consumer electronic devices
Telecommunication devices
Office facilities
Industrial equipments



■ Dimensions and Installation



UL2464 18/16AWG ,1500mm $\pm$ 50

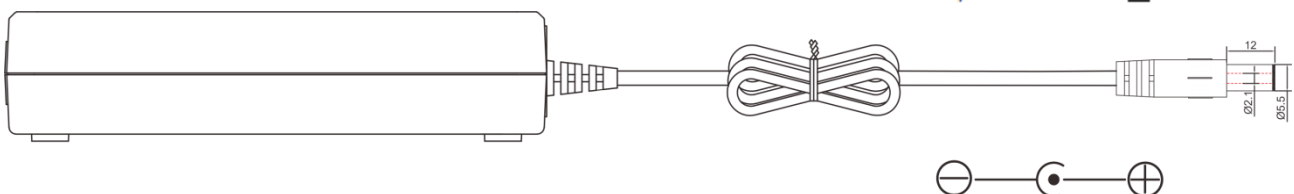


YS100 SERIES


MODEL DETAIL SPEC.		YS100-0901000	YS100-1208330	YS100-150660	YS100-1905260	YS100-2404160	YS100-3602770
INPUT	Input Voltage:	85-265VAC					
	Input Frequency:	50/60Hz					
	Inrush Current:	40A/115VAC 60A/230VAC					
	AC Current:	1.5A max.					
	Leakage Current:	< 0.25mA/240VAC					
	Efficiency:	89%	89%	89%	90%	91%	91%
OUTPUT	DC Voltage:	9V	12V	15V	19V	24V	36V
	Rated Current:	10A	8.33A	6.66A	5.26A	4.16A	2.77A
	Rated Power:	90W	100W	100W	100W	100W	100W
	Voltage Tolerance:	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%
	Ripple and Noise:	120mVp-p	120mVp-p	150mVp-p	200mVp-p	250mVp-p	300mVp-p
	Line Regulation:	±3%					
	Load Regulation:	±5%	±5%	±5%	±5%	±5%	±5%
	Setup, Rise, Hold Up time:	500ms, 30ms/120ms 230VAC 1000ms, 30ms/25ms 115VAC at full load					
ENVIRONMENTAL	Operating Temperature:	-20 ~ +70 (Refer to "Derating Curve")					
	Storage Temp:	-40℃ ~ 85℃					
	Storage Humidity:	10 ~ 95% RH					
	Working Humidity:	20 ~ 95% RH non-condensing					
PROTECTION	Over Load:	105% -150% rated output power					
		Protection type: Hiccup mode, recovers automatically after fault condition is removed					
	Over Voltage:	105% -130% rated output power					
		Protection type: Shut down o/p voltage, re-power on to recover					
	Over Temperature:	When the NTC resistance temperature is between 85℃ and 100℃ ,The power supply shall be protected and no deformation and no discoloration on case					
SAFETY & EMC	Safety Regulations:	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, BSMI CNS14336-1, AS/NZS 62368.1 approved					
	Withstand Voltage:	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC					
	Isolation Resistance:	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH					
	EMC Emission:	Compliance to BS EN/EN55032 (CISPR32), BS EN/EN61204-3 Class B, BS EN/EN61000-3-2,-3, EAC TP TC 020, CNS13438 Class B					
	EMC Immunity:	EN/EN61000-4-2,3,4,5,6,8,11					
OTHER	MTBF:	500Khrs min. MIL-HDBK-217F(25℃)					
	Size:	155*60*39mm					
	Weight:	500g / pcs					
	Packaging:	20PCS/CTN					

YS100 SERIES

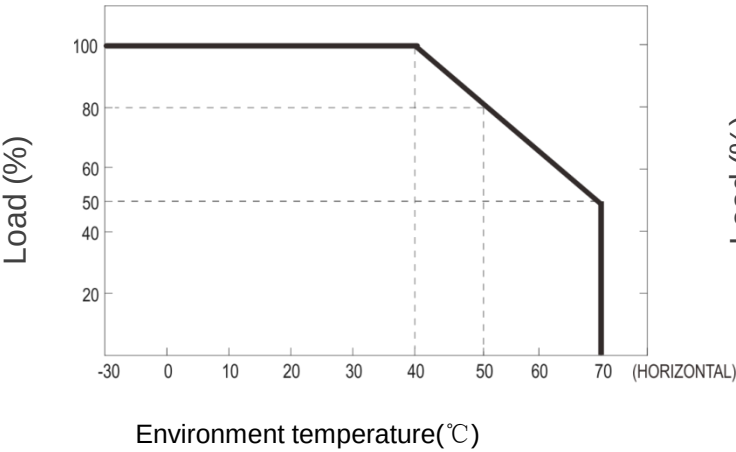Deduction curve and temperature



Minus output and input voltage curves

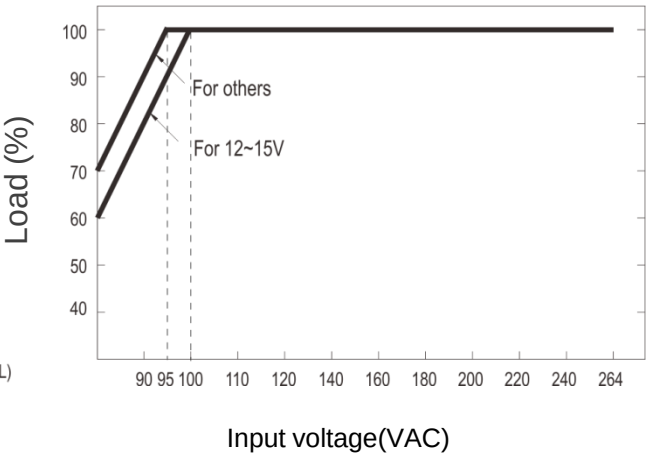

DC output plug

Standard plug: D1M

D1M	Pin Assignment
 	
	Outside  Inside 
	-V not connected to AC FG(standard) -V connected to AC FG(optional)









DC plug changeable through:

- (1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)
 - (2) Quick adapter accessory (sold separately without MOQ)
- Please refer to below table and online selection guide :

Example quick adapter accessory:





YS100 SERIES

Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style		Type No.	A	B	C	Quick Adapter Accessory	
			OD	ID	L		
   (Straight)  (Right-angled)	D1I	5.5	2.1	9.5	Available (Current rating: 7.5A max.)		
	D1L	5.5	2.5	9.5			
	D1M	5.5	2.1	11.0			
	D1IR	5.5	2.5	9.5			
	D1JR	5.5	2.1	11.0			
	D1LR	5.5	2.5	9.5			
	D1MR	5.5	2.5	11.0			
Barrel Style		Type No.	A	B	C	Quick Adapter Accessory	
			OD	ID	L		
   (Straight)  (Right-angled)	D2I	5.5	2.1	9.5	None		
	D2J	5.5	2.1	11.0			
	D2L	5.5	2.5	9.5			
	D2M	5.5	2.1	11.0			
	D2IR	5.5	2.5	9.5			
	D2JR	5.5	2.1	11.0			
	D2LR	5.5	2.5	9.5			
D2MR	5.5	2.5	11.0				
Lock Style		Type No.	A	B	C		
			OD	ID	L		
   Floating Locking SWITCHCRAFT original or equivalent	D2S(S761K)	5.53	2.03	12.06	None		
	D2K(761K)	5.53	2.54	12.06			
	D2C(S760 K)	5.53	2.03	9.52			
	D2D(760K)	5.53	2.54	9.52			
Center Pin Style		Type No.	A	B	C	D	Available (Current rating: 7.5A max.)
			OD	ID	L	Center Pin	
   EIAJ equivalent	D4A	5.5	3.4	11.0	1.0		
	D4B	6.5	4.4	11.0	1.4		
	D4C	7.4	5.1	11.0	0.6		
Min. Pin Style		Type No.	A	B	C		
			OD	ID	L		
   EIAJ equivalent	D3A	2.35	0.7	11.0	Available (Current rating: 5A max.)		
	D3B	4.0	1.7	11.0			
	D3C	4.75	1.7	11.0			

YS100 SERIES

Optional DC plug: (Available in customized cable or quick adapter)

Min.Din 3Pin with Lock (male)	Type No.	Pin Assignment		Quick Adapter Accessory
		PIN No.	Output	
   KYCON KPPX-3P equivalent	M6B	1	+Vo	Available (Current rating: 7.5A max.)
		2	-Vo	
		3	+Vo	
Min.Din 4Pin with Lock (male)	Type No.	Pin Assignment		
		PIN No.	Output	
   KYCON KPPX-4P equivalent	M7B	PIN No.	Output	Available (Current rating: 7.5A max.)
		1	+Vo	
		2	-Vo	
		3	-Vo	
		4	+Vo	
Min.Din 4Pin with Lock (female)	Type No.	Pin Assignment		
		PIN No.	Output	
   KYCON KPJX-CM-4S equivalent	M7BF	PIN No.	Output	None
		1	+Vo	
		2	-Vo	
		3	-Vo	
		4	+Vo	
DIN 5Pin (male)	Type No.	Pin Assignment		
		PIN No.	Output	
  	M1B	PIN No.	Output	Available (Current rating: 7.5A max.)
		1	-Vo	
		2	-Vo	
		3	+Vo	
		4	-Vo	
		5	+Vo	
Stripped and tinned leads	Type No.	Pin Assignment		
		PIN No.	Output	
	by customer	1	+Vo	None
		2	-Vo	